



First **DLP 4K UHD** Home Cinema Projector



- 4K UHD Resolution • 8.3 Million Pixels • 4K Upscaling from 1080p • THX 4K Certified Display
- Rec. 709 Colour Fidelity • CinemaMasterVideoEnhancer • 1.5x Zoom, H/V Lens Shift



W11000



Because it matters

W11000

Home Cinema Projector



OPTIONAL ACCESSORY




Ceiling Mount: 5JJCY10.001

Specification

| Model | W11000 |
|----------------------------------|--|
| Projection System | DLP 4K UHD |
| Resolution | 3840 x 2160 with XPR technology |
| Display Pixels | 8.3 million |
| Brightness | 2200 AL |
| FOFO Contrast Ratio | 50,000:1 with Dynamic Iris |
| Display Colour | 1.07 Billion Colours |
| Lens | f=2.05 f=20.5~30.4 |
| Aspect Ratio | 16:9 |
| Throw Ratio | 1.37 - 2.06(100"@3m) |
| Image Size (Clear Focus/Maximum) | 95"~180"/300" |
| Zoom Ratio | 1.5:1 |
| Lamp Type | PHILIPS 240W E22.7 |
| Lamp Mode (Normal/Eco/SmartEco)* | 3000 / 4000 / 6000 hours |
| Lens Shift | Vertical: ± 65% / Horizontal: ± 27% |
| Resolution Support | VGA(640x480) to 4K2K_RB(4096x2160) *RB = Reduced Blanking |
| Horizontal Frequency | 15 - 102KHz |
| Vertical Scan Rate | 23 - 120Hz |
| Colour Wheel Segment | 6-Segment (RGBRGB) |
| Colour Wheel Speed | 6x (50Hz), 4x (60Hz) |
| Compatibility | HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p 2560x1200, 3840x2160, 4096x2160 Video Compatibility: NTSC, PAL, SECAM |
| Vertical Scan Rate | 23 - 120Hz |
| Interface | PC (D-Sub): x 1 HDMI: x 2 (HDMI 1.2.0 / HDCP 2.0 support x 1) USB (Type mini B) x 1 (Service) LAN x 1 RS232 x 1 DC 12V Trigger x 2 IR Receiver x 2 (Front & Back) IR in x 1 |
| Dimensions (L x W x H) | 470.7 x 224.9 x 564.7 mm |
| Weight | 14.8kg |
| Power Supply | AC100 to 240V, 50 to 60 Hz |
| Power Consumption | Normal 353W, Eco 290W, Network Standby <6W Standby <0.5W |
| Audible Noise | 26/23 dBA (Normal/Economic mode) |
| Languages | English/ Spanish/ French (28 Languages) |
| Picture Mode | ** ISF Disabled: Bright / Vivid / Cinema/THX/ Silence/ User 1/ User 2 *** ISF Disabled: Bright / Vivid / Cinema/THX/ Silence/ User 1/ User 2 / ISF Night / ISF Day |
| Accessories (Standard) | Lens Cover, Remote Control with Battery, Power Cord (by region), User Manual CD, Quick Start Guide, Warranty Card |
| Accessories (Optional) | Spare Lamp Kit, Ceiling Mount, Anamorphic lens |
| Environmental Notice | Lamp in this product contains mercury. To dispose of the product or used lamps, consult your local environment authorities for regulations or see www.lamprecycle.org . |

* Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice. ** Default picture mode is THX. *** When ISF is enable, default picture mode is ISF Night.

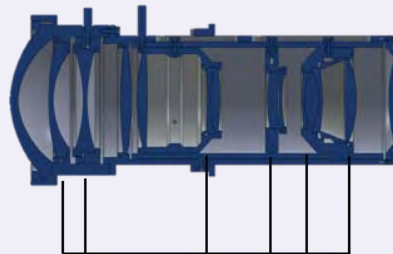

Extra low dispersion glass

Lens Optimized for 4K Images

- 4K lens featuring 14-piece lens in six grouping structure
- 6-piece extra low dispersion coating glass lens

Greater Light Penetration to provide 4K details with Best Color, Clarity & Sharpness



Dealer's Stamp

HCC/AIM
Free Call (AU)
1800 008899
homecinemacentral.com.au



Because it matters